

# MONESSEN



**DFS32C**

## INTERIOR DIMENSIONS

Front opening width - 29-7/8"  
 Front opening height - 21-7/8"  
 Rear wall width - 23-3/8"  
 Firebox depth - 13-1/4"

## TECHNICAL INFORMATION

Max. BTU Input - 38,000 BTU/HR  
 Ignition System - Standing Pilot  
 Gas Type - Natural or LP  
 Controls - Millivolt  
 Clearance on Fireplace - Zero  
 CSA Design Certified





## FACTORY INSTALLED OPTIONS

Variable Thermostat Controlled Forced Air Blower (160cfm) - BTC  
 Cottage Clay Firebrick - F  
 Polished Brass Louvers - L

## FIELD INSTALLED ACCESSORIES

Variable Thermostat Controlled Forced Air Blower (160cfm) - BLOTMC  
 Curved Trim - Brass, Pewter, Black  
 Medium Trim - Brass, Pewter, Black  
 Louvers - Polished Brass, Pewter  
 Cottage Clay Firebrick  
 Cottage Red Firebrick  
 Remote Controls & Thermostats  
 Wood Cabinet Surrounds and Hearths  
 Designer Facings

## PRODUCT SPECIFICATIONS DFS32C VENT FREE

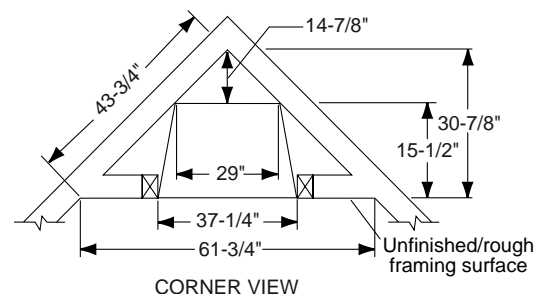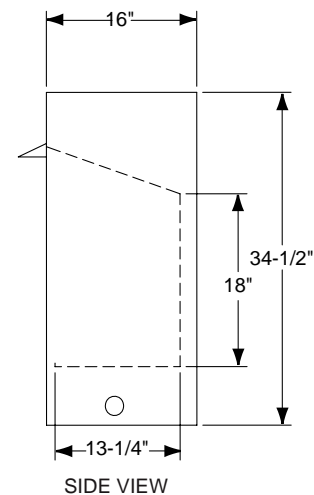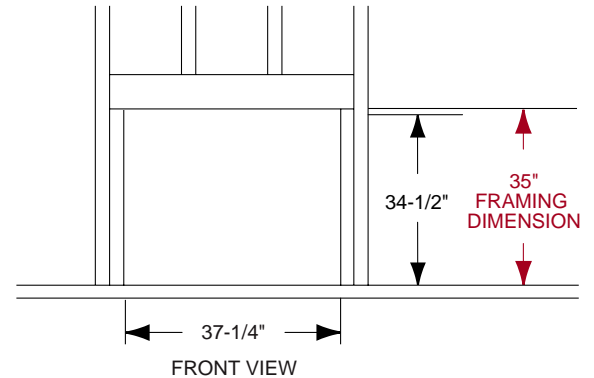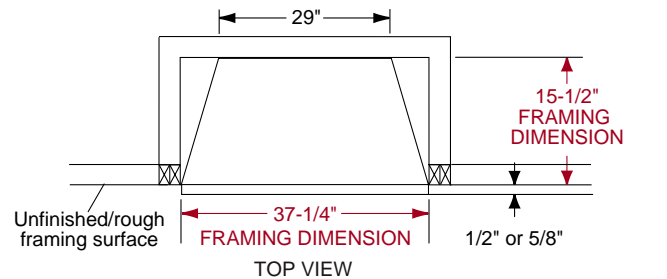

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. 6/05



# MONESSEN

## PRODUCT SPECIFICATIONS DFS42C VENT FREE



**DFS42C**

### INTERIOR DIMENSIONS

Front opening width - 40"  
Front opening height - 21-7/8"  
Rear wall width - 33-3/8"  
Firebox depth - 15-3/4"

### TECHNICAL INFORMATION





Max. BTU Input - 38,000 BTU/HR  
Ignition System - Standing Pilot  
Gas Type - Natural or LP  
Controls - Millivolt  
Clearance on Fireplace - Zero  
CSA Design Certified

### FACTORY INSTALLED OPTIONS

Variable Thermostat Controlled Forced Air Blower (160cfm) - BTC  
Cottage Clay Firebrick - F  
Polished Brass Louvers - L

### FIELD INSTALLED ACCESSORIES

Variable Thermostat Controlled Forced Air Blower (160cfm) - BLOTMC  
Curved Trim - Brass, Pewter, Black  
Medium Trim - Brass, Pewter, Black  
Louvers - Polished Brass, Pewter  
Cottage Clay Firebrick  
Cottage Red Firebrick  
Remote Controls & Thermostats  
Wood Cabinet Surrounds and Hearths  
Designer Facings

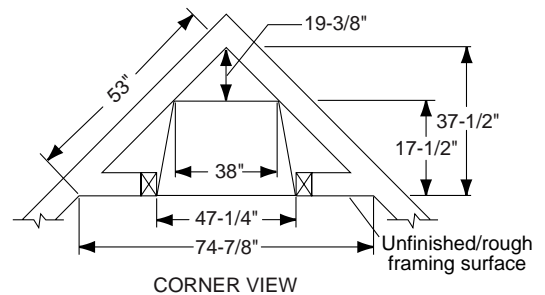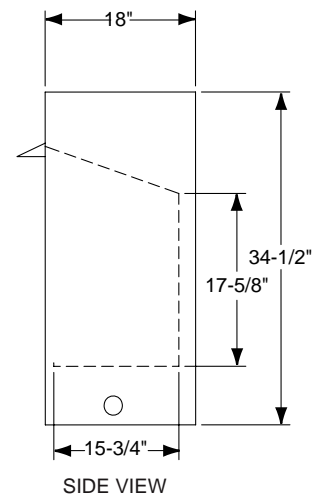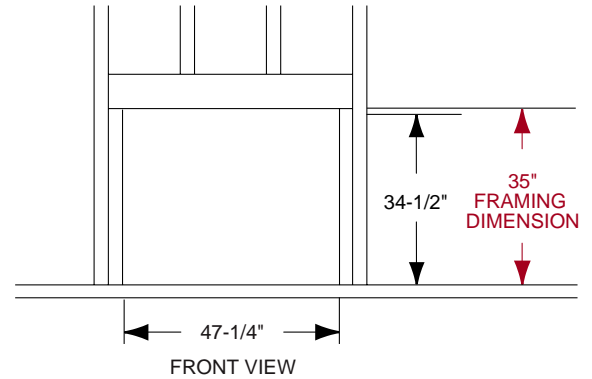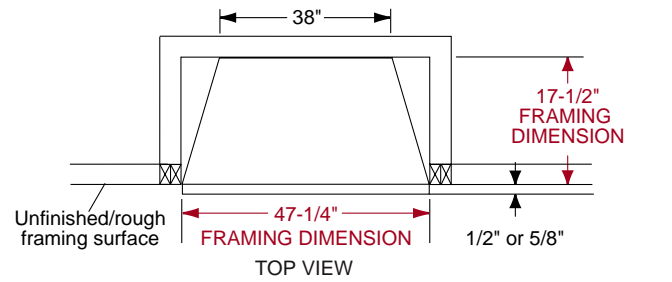

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. 6/06